

condensate pumps

For air conditioning
and refrigeration
technology





Condensate pumps in air conditioning technology

Condensation is the change of state of the physical state of matter from gas phase into liquid phase and is the reverse of vaporisation. It can also be defined as the change in state of water vapour to liquid (water) when in contact with any surface (evaporator coil). Condensation occurs under certain conditions relating to temperature & pressure.

When gravity drainage is not possible or is impractical, condensate removal pumps are necessary to evacuate water to a drain point above the collection tray, where natural gravity is possible. Eckerle pumps are fully-automated and are controlled using internal or external sensor technology.



EE600

Micro-Condensate Pump

Usage

This float type pump is mainly used in air conditioners with a limited space inside, e.g. wall mounted mini split and ceiling units. The small sensor can easily be adapted to the air conditioner's condensate drain hose.

Description


The EE600 system consists of a pump unit and a separate 2-level float switch sensor. It comes with mounting accessories like pads of double-sided Scotch Tape to fix the float switch and an anti-shock mount for the pump unit.

For air conditioners up to 7.5 kW

Technical Data

Pump unit (L x W x H)	77 x 32 x 50 mm
Electrical spec.	230 V, 50/60 Hz
Power Consumption	Operation 13 W Standby 1 W
Sensor unit (L x W x H)	82 x 39 x 39 mm
Max. flow rate	6 l/h
Max. delivery height	6 m
Max. suction height	1.5 m

Impervious to blockage or contamination due to unique valve design & large piston bore



EE1000

Mini-Condensate Pump

Usage

This float type pump is mainly used in air conditioners with a limited space inside, e.g. wall mounted mini split and ceiling units. The small sensor can easily be adapted to the air conditioner's condensate drain hose.

Description

The EE1000 system consists of a pump unit and a separate 3-level float switch sensor. Beside the on/off function the system offers a high level, potential free NO / NC alarm switch (230 V, 8 A ohmic load).

For air conditioners up to 10 kW

Technical Data

Pump unit (L x W x H)	77 x 37,5 x 62 mm
Electrical spec.	230 V, 50/60 Hz
Power Consumption	Operation 8 W Standby 1 W
Sensor unit (L x W x H)	82 x 39 x 39 mm
Max. flow rate	10 l/h
Max. delivery height	10 m
Max. suction height	1.5 m
Alarm switch	max. 230 V, 8 A (ohmic load) NO / NC (normally open/ normally closed)
Float switch operating points	see rear of Accessories „Float detector“

Impervious to blockage or contamination due to unique valve design & large piston bore



EE1800

Mini-Condensate Pump

Usage

This float type pump is mainly used in air conditioners with a limited space inside, e.g. wall mounted mini split and ceiling units. The small sensor can easily be adapted to the air conditioner's condensate drain hose.

Description

The EE1800 system consists of a pump unit and a separate 3-level float switch sensor. Beside the on/off function the system offers a high level, potential free NO / NC alarm switch (230 V, 8 A ohmic load).

The system comes with mounting accessories like pads of double-sided Scotch Tape to fix the float switch and an anti-shock mount for the pump unit.



For air conditioners up to 18 kW

Technical Data

Pump unit (L x W x H)	77 x 37,5 x 62 mm
Electrical spec.	230 V, 50 / 60 Hz
Power Consumption	Operation 14 W Standby 1 W
Sensor unit (L x W x H)	82 x 39 x 39 mm
Max. flow rate	18 l/h
Max. delivery height	10 m
Max. suction height	2.5 m
Alarm switch	max. 230 V, 8 A (ohmic load) NO / NC (normally open / normally closed)
Float switch operating points	see rear of Accessories „Float detector“
Impervious to blockage or contamination due to unique valve design & large piston bore	

EE1200^K


Mini-Condensate pump with duct

Usage

The EE1200^K has particularly been designed for direct installation into the Eckerle-duct-system. Equal to the other volumetric systems of Eckerle the EE1200^K comes with a high quality Swiss made piston pump inside. These pumps were specially developed to deliver condensate water. They offer wide opening duck-bill-valves (non-sensitive against water borne contaminants) and further-more they run remarkably quiet. These design and component features ensure a pump system with a long life expectancy. They provide a higher-than-average performance even at great delivery heights.

Description

The EE1200^K comes in a set with a duct, an elbow, a ceiling seal and installation accessories. On request a special moulded foam part is available for different duct brands. This provides an easy mounting into pre-existing ducts.



For air conditioners up to 7,5 kW

Technical Data

Electrical spec.	230 V, 50 / 60 Hz, 8 W
Max. flow rate	8 l/h
Max. delivery height	6 m
Cable duct dimensions (L x W x H)	800 x 80 x 60 mm
Alarm switch	max. 230 V, 8 A (ohmic load) NO / NC (normally open / normally closed)
Duct colour	RAL9016 (traffic white)
Impervious to blockage or contamination due to unique valve design	

EE1750^M

Maxi-Condensate Pump


Usage

This float type pump is used in conjunction with air conditioners which have condensate collection tanks with an outlet on the drainage pipework: Cassette, ceiling unit, split, fan convectors.

Description

The EE1750^M comprises a pump unit and a 3-level float switch sensor. The float switch controls On, Off and Alarm conditions.

The float switch unit is fixed to the tank outlet or to a pipe end, it is connected to the pump unit by a 1.5 m/5 ft long pipe and cable (an optional extension is available).



For air conditioners up to 30 kW

Technical Data

Pump unit (L x W x H)	100 x 81,5 x 67 mm
Electrical spec.	230 V, 50 / 60 Hz, 40 W
Sensor unit (L x W x H)	82 x 39 x 39 mm
Max. flow rate	32 l/h
Max. delivery height	15 m
Max. suction height	3 m
Alarm switch	max. 230 V, 8 A (ohmic load) NO / NC (normally open / normally closed)
Float switch operating points	see rear of Accessories „Float detector“

EE1650^M

High-Lift Tank Pump

Usage

This compact unit with integrated float switch is designed to be used inside devices equipped only with a condensate collecting tank such as fan convectors, cabinet models, built-in units, water collection consoles etc. Steps must be taken to ensure that no fluid runs over the pump!

Description

The delivery system is equipped with 2 separately operating float switches. The working float switch turns the pump on and off depending on the filling level (with run-on time).

The function of the alarm float switch is to isolate the break contact element.



For air conditioners up to 30 kW

Technical Data

Pump unit (L x W x H)	244 x 174 x 144 mm
Electrical spec.	230 V, 50/60 Hz, 40 VA
Alarm switch	230 V, 8 A (ohmic load) NO / NC (normally open / normally closed)
Max. flow rate	32 l/h
Max. delivery height	15 m
Tank capacity	2 l
Operating points*	Alarm: max. 53 mm Start: 40 ± 2 mm Stop: 30 ± 2 mm

*Measurements from mounting surface.

EE150

Tank Pumps

Usage

The Eckerle condensate pumps EE150, EE300, EE400^M and EE400^M Premium are designed to remove condensate water out of air conditioners, evaporator coils and high efficiency gas furnaces automatically. The pump housing is made from an impact-resistant plastic body against corrosion.

Description

EE150 & EE300

- Silent running centrifugal with 1,5 m power cord
- Check valve to prevent back-flow of liquid into the unit
- Compact size
- Attractive design
- Cover with well-designed panel (only EE150)
- Overflow safety alarm switch (only EE300)

For air conditioners up to 10 kW

Technical Data

EE150

Pump unit (L x W x H)	165 x 65 x 85 mm
Electrical spec.	230 V, 50/60 Hz, 48 VA
Max. flow rate	120 l/h
Max. delivery height	1,5 m
Tank capacity	max. 0,2 l
Pressure hose - Ø	8 x 2 mm

EE300

EE400^M/EE400^M P

- Extremely quiet running and vibration-free
- Pump encapsulated and liquid cooled
- Protection class IP 55
- Max. medium temperature: 70° C
- Most compact design
- Pump housing made of glass-reinforced plastic material, including wall mounting accessory
- Separate alarm contact
- Integrated check valve
- **EE400^M Premium:** Version with additional alarm detector (special plug with integrated LED and buzzer), incl. 6 m PVC-tube

Pump unit can be used in an external pan as well.
Pan height: min. 62 mm, max. 70 mm

For air conditioners up to 50 kW

Technical Data

EE300

Pump unit (L x W x H)	200 x 105 x 160 mm
Electrical spec.	230 V, 50/60 Hz, 65 VA
Max. flow rate	200 l/h
Max. delivery height	4 m
Tank capacity	max. 1 l
Pressure hose - Ø	8 x 2 mm

EE400^M/EE400^M P

Pump unit (L x W x H)	185 x 85 x 100 mm
Electrical spec.	230 V, 50/60 Hz, 65 VA
Alarm switch	230 V/ 8 A (ohmic load) NO/NC (normally open/ normally closed)
Max. flow rate	350 l/h
Max. delivery height	4 m
Tank capacity	max. 0,5 l
Pressure hose - Ø	8 x 2 mm
Operating points*	Alarm: max. 55 mm Start: 52 ± 1 mm Stop: 24 ± 1 mm
EE400 ^M Premium	Safety device visual and acoustical alarm

*Measurements from mounting surface

EE400^M

with tank



Eckerle offers you two different pump systems


1. Electromagnetic pump

Usually found in two-part systems or split-systems such as the EE600, EE1000, EE1800, E1200 and EE1750, but also used in certain tank pumps such as the EE1650 in order to achieve higher lifting heights. Most Eckerle electromagnetic pumps have non return “duckbill valves”, whose large bore ensure that they are significantly less sensitive to dirt.

2. Centrifugal pump

Almost all tank pumps are equipped with this robust technology, for example the EE150, EE300 and the EE400. The main features of this volumetrically wide-open displacement device are its high displacement volumes and insensitivity to dirt. Special encapsulated versions with a higher protection rating – like the EE400^M/EE400 – can be operated in tough environments with high humidity levels and with media that is far from the PH neutral range.

Performance Diagrams

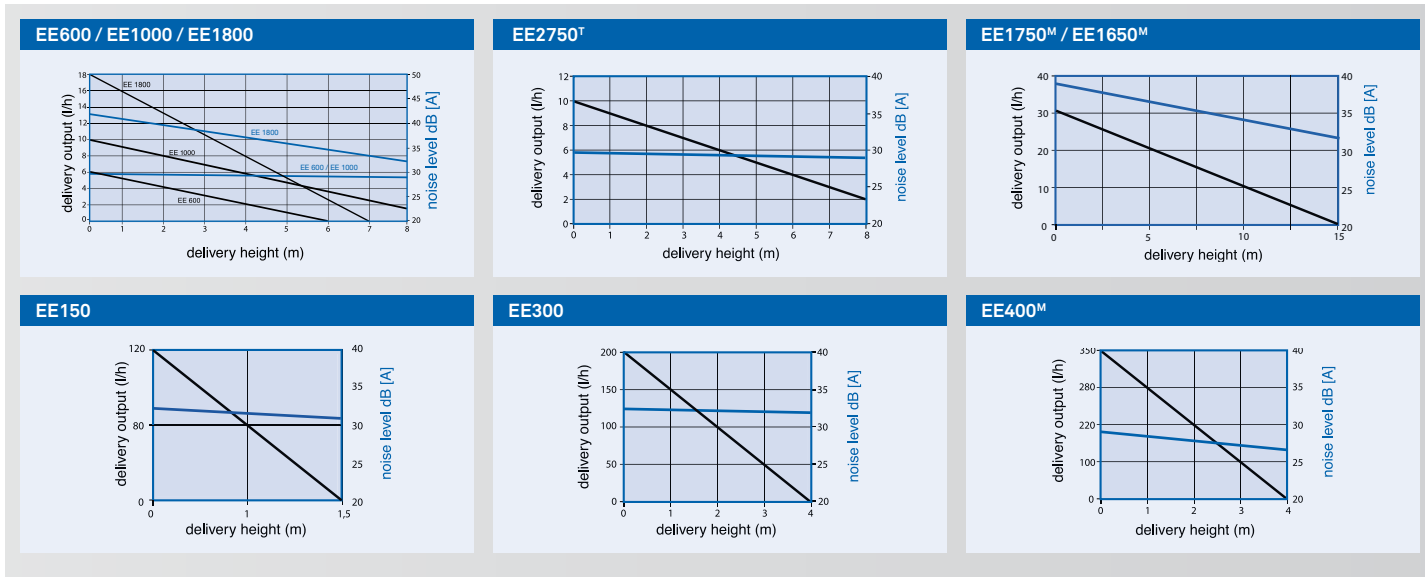

EFC2A/EFC4A

Fan Controller

Usage:

The EFC Fan Controller is suitable for all air cooled condensing units in air conditioning and refrigeration units with fan motor max. currents up to 2A resp. 4A (ohmic load).

Description:

The controller provides not only the correct speed for the outdoor fan, it also determines whether the fan should stop and for how long, to give an optimum control to the system. Furthermore the control prevents over condensing even with outdoor temperatures down to -20°C and no iced-up Indoor coils. Due to decreased compressor running time, a higher efficiency will be achieved.

Intelligent control

Technical Data:

EFC2A (L x W x H)	104 x 69 x 39 mm
EFC4A (L x W x H)	123 x 29 x 33 mm
Electrical spec.	230 V, 50 Hz
Electrical load	Fan Motor max. current 2A/4A (ohmic load)
Regulation	Phase modulation according sensor temperature and set point 0% or 40% to 100% <ul style="list-style-type: none"> • at 0%, the fan is off • at 40%, the fan speed is minimum • at 100%, the fan speed is maximum
Sensor	Fixation with mounted releasable tie cable length approx. 1 m ends with caps



Accessories

Order no

	Extension cable 3 m for EE600, EE1000, EE1800, EE1750 ^M	22003
	Extension cable 5 m for EE600, EE1000, EE1800, EE1750 ^M	22005
	Extension cable 10 m for EE600, EE1000, EE1800, EE2750T	22010
	PVC hose for EE600, EE1000, EE1800, EE1650 ^M , EE1750 ^M , 50m roll, inner-Ø 6 mm x 1,5 mm	22150
	PVC hose for EE150, EE300, EE400 ^M , 50m roll, inner-Ø 8 mm x 2 mm	0505050024
	Inline filter for EE600, EE1000, EE1800, EE1750 ^M	21757
	Check valve for E600, EE1000, EE1800, EE1750 ^M , EE1650 ^M	22011
	Float detector for EE1750 ^M	9001301002
	Float detector for EE600, EE1000, EE1800	9001301008
	Operating points*: Alarm: max. 23 mm Start: 20 ± 1 mm Stop: 15 ± 1 mm	
	Hose connector (straight), Ø 6 mm	1948050002
	Hose connector (straight), Ø 8 mm	1948050010
	Hose connector 90° PVC, 15 x 2 mm	112547

*The measure specification refers to the lower bottom of the sensor. The working float switch turns the pump on and off depending on the filling level (with run-on time). The function of the alarm float switch is to isolate the break contact element. (Alarmswitch max. 230 V, 8 A ohmic load).

All indicated data serve alone the product description and are not as characteristics in the legal sense to be understood. Subject to alterations.



Learn more:
eckerle.com

Eckerle Industrie-Elektronik GmbH
Otto-Eckerle-Straße 12A
76316 Malsch, Germany
Tel. +49 (0) 7246 9204-0
info@eckerle.com

eckerle